

DS-2CE56D5T-IT3

HD1080p Turbo HD EXIR Turret Camera




EXIR



Key Features

- HD1080p Video Output
- HD-TVI Standard Technology
- True Day/Night
- OSD Menu, 3D DNR, Smart IR
- EXIR Technology, 20 m IR Distance
- IP66 Weatherproof
- Up-the-Coax (UTC) OSD Menu Control
- 120 dB Wide Dynamic Range

Dimensions

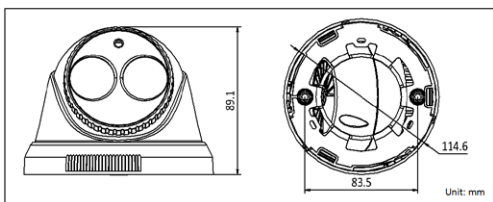

Accessories



Indoor/Outdoor Wall Mount
WMS + PC110



Indoor Wall Mount
WM110



Video Balun
DS-1H18

Available Models

DS-2CE56D5T-IT3

DS-2CE56D5T-IT3	
Camera	
Image Sensor	1/3" progressive scan CMOS
Signal System	NTSC
Effective Pixels	1920 x 1080
Minimum Illumination	0.028 lux @ (f/2.0, AGC on), 0 lux with IR
Shutter Speed	1/25 (1/30) sec. to 1/50,000 sec.
Lens	3.6 mm, f/2.0 (2.8 mm, 6 mm, 12 mm optional) Angle of view: 80.9° (3.6 mm), 103.5° (2.8 mm), 54.3° (6 mm), 24.3° (12 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0–360°, tilt: 0–90°, rotation: 0–360°
Day/Night	IR cut filter
Wide Dynamic Range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps
HD Video Output	1 analog HD output
CVBS Output	1 V p-p composite output (75Ω/BNC)
S/N Ratio	More than 52 dB
Menu	
Automatic Exposure	Globe AE/DWDR
AGC	Supported
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Motion Detection	Support, maximum 4 zones
Privacy Mask	8, selectable color or mosaic
BLC	Supported
Anti-Flicker	On/off
Languages	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew, and Arabic
Functions	Digital wide dynamic range, 3D digital noise reduction, sharpness, brightness, digital zoom, mirror
General	
Working Temperature/ Humidity	-30° C–60° C (-22° F–140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ±10%
Power Consumption	Maximum 5 W
Weather Proof Rating	IP66
IR Range	Up to 40 m IR range
Communication	Up-the-Coax
Dimensions	φ114.6 × 89.1 mm (φ4.5" × 3.5")
Weight	300 g (0.66 lb.)